		1		2	3	3		4	5	Customer	drawing
	REV	ECN NO	DESCRIPT	TION	DATE APPROVED						
	AA	AA - NEW RELEASED			2020. 03. 25	CLARA					
A			,		,		_				
	A										
									73. 0		
								-	70.0		
		M	atorial or	ocifications							
F		Material specifications				<b>† †</b>					

Insulation Housing: PA66, Black Contact: Copper Alloy, Gold-Plated Shell: Copper Alloy, Nickel-Plated

Overmolding: Black PVC

## Technical Data:

1. Standard: -


2. Rated Voltage: See Table 1 3. Rated Current: See Table 1

4. Rated Temperature: -40°C~+80°C

5. Durability: ≥500 Times Cycles

6. Protection Degree: IP67(Correct locking state)

Manufacturer: Bomcan.com

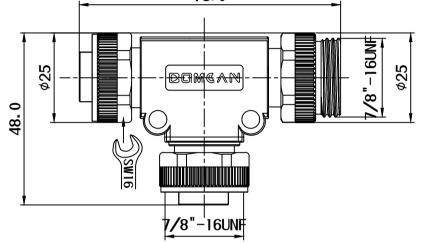



## Connector Table 1

С

www. bomcan. com

Bomcan Part No.	Coding & Pins	Plug Pin out	Socket Pin out	Contact Size(mm)	Rated Current	Rated Voltage
M78T03PSSP01	A Code 3 Pin	3 • 1	20 03	2.0	12A	600V/DC
M78T04PSSP01	A Code 4 Pin	3 • 2 4 • 1	20 03	2.0	12A	600V/DC
M78T05PSSP01	A Code 5 Pin	40 02 50 01	30 O4 20 + O5	2.0	10A	600V/DC

2

This drawing contains information that is proprietary to BOMCAN and should not be used without written permission. Powered by bomcan.com

								1	
DESCRIPTION	MINI CHANGE 7/8"-16UNF CONNECTOR T-SPLITTER ADAPTER								
DWG NO	M78TXXPSSP01		BOMCAN PA	M78TXXPSSP01				ם [	
DRAWN BY	CLARA 2020.03.25	;	CUSTOMER P/N		_				
CHECKED BY	CALEB 2020.03.25	;	SIZE: A4	SHEET	UNIT		SCALE	Third angle projection	n
APPROVED BY	BILL 2020.03.25		REV: AA	1 of 1	MN	١	FREE		
4			5			A4			_

3