


REV	ECN NO	DESCRIPTION	DATE	APPROVED
AA	-	NEW RELEASED	2019. 12. 01	CLARA

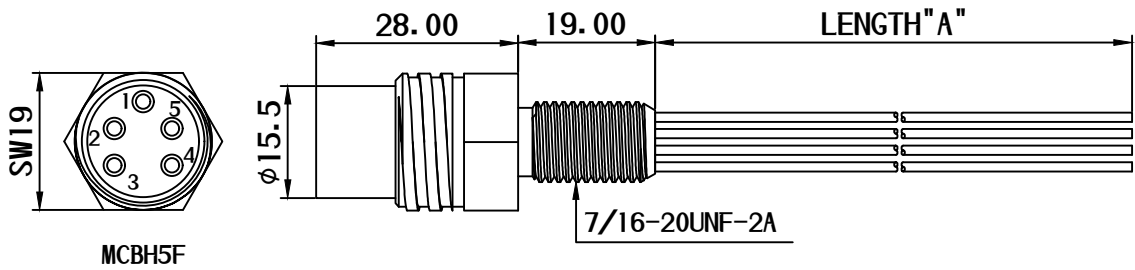

Connector specifications:
 Voltage rating: 300V DC/AC rms
 Current rating: 5A per contact(max 10A per connector)
 Insulation resistance: $\geq 200 \text{ M}\Omega$
 Contact resistance: $< 0.01 \text{ }\Omega$
 Durability: ≥ 500 Times Cycles.
 Temperature rating (water): -4°C to $+60^\circ\text{C}$
 Temperature rating (air): -40°C to $+60^\circ\text{C}$
 Storage temperature rating: -40°C to $+60^\circ\text{C}$
 Qualified pressure tested: 800bar, 11600psi, 80MPA
 (8 kilometers underwater)

Material specifications:
 Connector body: Chloroprene rubber,Black
 Bulkhead body: Brass, plated nickel
 Contacts: Male pins in gold plated beryllium copper
 Female sockets in gold plated brass
 O-rings: Nitrile rubber
 Snap rings: Stainless steel

Cable specifications
 22AWG WHITE PTEF wires



This drawing contains information that is proprietary to BOMCAN and should not be used without written permission. Powered by bomcan.com

DESCRIPTION	MCBH5F SOCKET MICRO UNDERWATER CONNECTOR CABLE ASSEMBLY			
DWG NO	MCBH5F	BOMCAN PART No	MCBH5F-L*	
DRAWN BY	CLARA 2019. 12. 01	CUSTOMER P/N	-	
CHECKED BY	CALEB 2019. 12. 01	SIZE: A4	SHEET	UNIT
APPROVED BY	BILL 2019. 12. 01	REV: AA	1 of 1	MM
			SCALE	Third angle projection
			FREE	

A

B

C

A

B

C

D