


1	2	3	4	5
REV	ECN NO	DESCRIPTION	DATE	APPROVED
AA	-	NEW RELEASED	2015.05.12	CLARA

A

B

C

www.bomcan.com

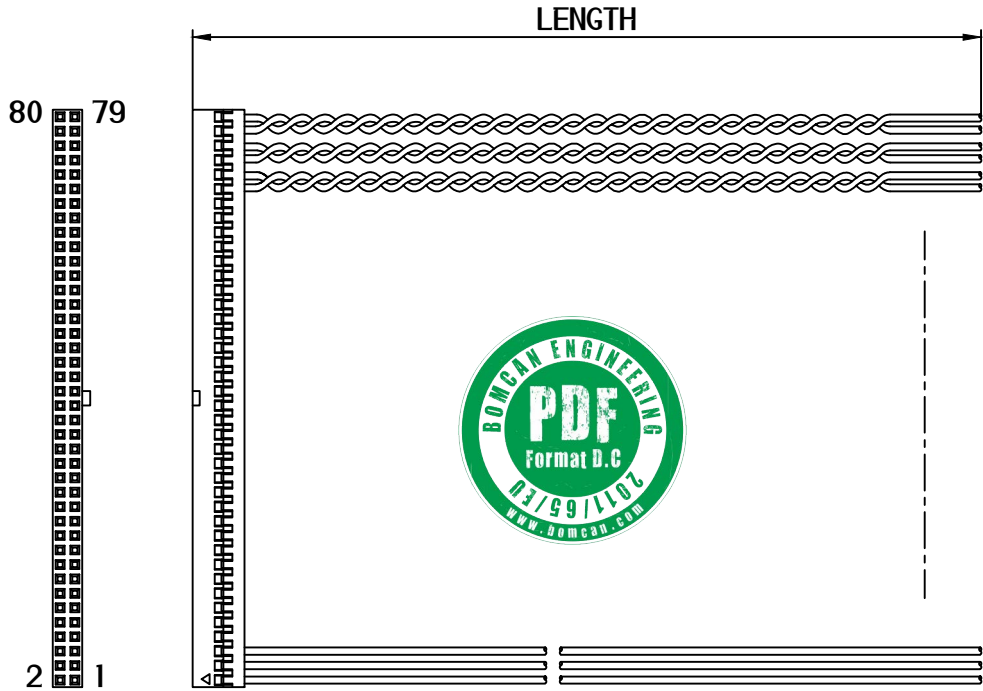

**Material:**

- . Housing: PA66,Black,UL94V-2
- . Contact: Phosphor bronze, Tin-plated

**Technical Data:**

- . Rated Voltage: 250V AC,DC
- . Rated Current: 1A
- . Rated Temperature: -25°C~+85°C
- . Contact resistance: Initial value/10m Ω max.  
After environmental testing/20m Ω max.
- . Insulation resistance: 500M Ω min.
- . Withstanding voltage: 1500V AC/minute
- . Applicable Wire: 26AWG~28AWG

<b>BOMCAN</b>		This drawing contains information that is proprietary to BOMCAN and should not be used without written permission. Powered by bomcan.com		
DESCRIPTION	2~80PINS DUPONT CONNECTOR TERMINAL WIRING HARNESS			
DWG NO	DUPONT20	BOMCAN PART No	-	
DRAWN BY	CLARA 2015.05.12	CUSTOMER P/N	-	
CHECKED BY	CALEB 2015.05.12	SIZE: A4	SHEET	UNIT
APPROVED BY	BILL 2015.05.12	REV: AA	1 of 1	MM
		SCALE	FREE	Third angle projection

A

B

C

D

1

2

3

4

5

A4