


REV	ECN NO	DESCRIPTION	DATE	APPROVED
AA	-	NEW RELEASED	2017.03.15	CLARA

Customer drawings  
**RoHS PASS**

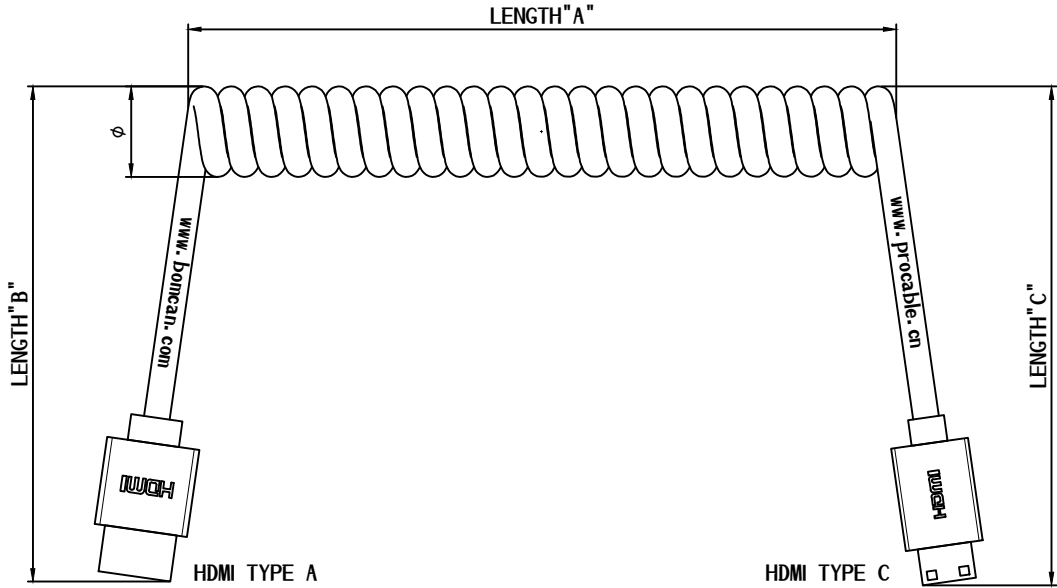


**Electrical specifications:**  
 Use of voltage range: 5V  
 Current range: 2A  
 Temperature range: -20°C~+80°C

**Material specifications**  
 Cable: HDMI Cable  
 Connector: HDMI-A/HDMI-C Connector  
 Overmolding: Black PVC

**Mechanical properties**  
 Minimum bending radius: Fixed installation: 8x Cable OD  
 Flexible installation: 10x Cable OD

**Electrical testing of finished cable**  
 100% Open / Short / Miswiring testing  
 Insulation resistance: DC300V 10MΩ  
 Conductor resistance: 5Ω

**Manufacturer: Bomcan**



UNMARKED TOLERANCES	
DIMENSIONS	TOLERANCE
x.	±1.0
x.x	±0.5
x.xx	±0.25
0 to 500	+15 / -0
< 501	+3% / -0 of length
ANGLES	
x°	±1°



This drawing contains information that is proprietary to BOMCAN and should not be used without written permission. Powered by bomcan.com

DESCRIPTION	HDMI PRE-MOLDED CABLE ASSEMBLY SPRING			
DWG NO	-	BOMCAN PART No	HDMI-SPRING-CABLE	
DRAWN BY	CLARA 2017.03.15	CUSTOMER P/N	-	
CHECKED BY	CALEB 2017.03.15	SIZE: A3	SHEET	UNIT
APPROVED BY	BILL 2017.03.15	REV: AA	1 of 1	mm
		SCALE	Free	Third angle projection

A3

www.bomcan.com